

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
27 October 2005 (27.10.2005)

PCT

(10) International Publication Number
WO 2005/100455 A1

(51) International Patent Classification⁷: C08J 3/12,
F26B 17/00

(21) International Application Number:
PCT/JP2005/004161

(22) International Filing Date: 3 March 2005 (03.03.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2004-116665 12 April 2004 (12.04.2004) JP
2004-356690 9 December 2004 (09.12.2004) JP

(71) Applicant (for all designated States except US): THE
YOKOHAMA RUBBER CO., LTD. [JP/JP]; 36-11,
Shimbashi 5-chome, Minato-ku, Tokyo 105-8685 (JP).

(72) Inventors; and

(75) Inventors/Applicants (for US only): KANENARI,


Daisuke [JP/JP]; c/o The Yokohama Rubber Co., Ltd.,
Hiratsuka Factory, 2-1, Oiwake, Hiratsuka-shi, Kanagawa
254-8601 (JP). KIRINO, Yoshiaki [JP/JP]; c/o The Yoko-
hama Rubber Co., Ltd., Hiratsuka Factory, 2-1, Oiwake,
Hiratsuka-shi, Kanagawa 254-8601 (JP).

(74) Agents: AOKI, Atsushi et al.; A. Aoki, Ishida & As-
sociates, Toranomon 37 Mori Bldg., 5-1, Toranomon
3-chome, Minato-ku, Tokyo 105-8423 (JP).


(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG,
KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG,
MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH,
PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

[Continued on next page]

(54) Title: METHOD FOR PRODUCING COMPOSITION CONTAINING POLYMER FROM LIQUID CONTAINING POLY-
MER COMPONENT AND DRYING APPARATUS FOR SAME

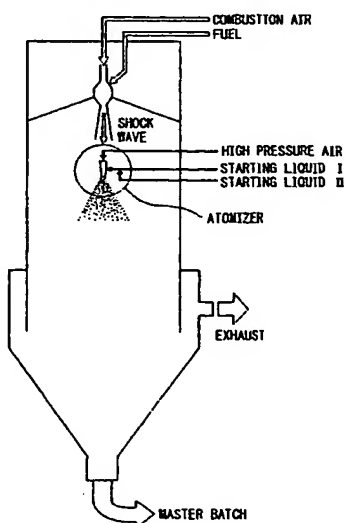

(57) Abstract: By spraying and drying a liquid containing a polymer component (e.g., nat-
ural rubber, synthetic rubber, etc.) and a liquid containing a filler (e.g., carbon black, silica,
etc.) under an atmosphere of a shock wave generated from pulse combustion, a polymer
containing a filler is produced at an improved work efficiency and heat efficiency, without
causing degradation of the quality, etc. of the product.



WO 2005/100455 A1



(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— with international search report